

CAMMS™ DFK Deployable Field Kits—Mesh Repeater & WiMax Distribution

The CAMMS™ DFK is a rugged, self-contained 'Deployable Field Kit' that enables rapid deployment of mobile communications and security/surveillance devices as well as instantaneous extension/expansion of CAMMS™ wireless mobile mesh networks.

Two versions of the DFK are available: the DFK and the DFK-LR (long range).

Each CAMMS™ DFK is equipped with a dual radio access point and acts as a repeater to extend the mesh network and also enables laptops, PDA's and video cameras to securely access the established mesh quickly and easily.

These compact systems are integrated into rugged, injection-molded cases that are dust-resistant, moisture-resistant, and crush resistant. They are built to operate with the lid closed to further protect the internal components from inclement weather, dust or other foreign material.

Removable, chassis-mount antennas (2.4 GHz and 4.9GHz) are included in each DFK, while the DFK-LR includes a WiMax antenna system. The battery system is designed for 16 hours use. During AC operation, the built-in multi-mode charger can operate the equipment and charge the battery simultaneously.



CAMMS™DFK-LR

"The WiMax-enhanced DFK-LR provides an exceptional increase in range for first responders"



CAMMS™DFK interior

"Quick and easy deployment whether to extend a mesh or add an IP video camera to the mesh."




CAMMS™ DFK exterior

"Can be deployed in or out of a vehicle and in all weather extremes."

Command Anywhere

CAMMS™

Command Anywhere Media Management System

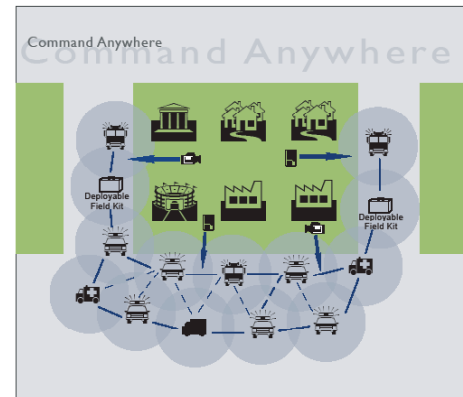

Wired LAN Connection
RJ45 Weather proof

Wireless Connection
2.4 GHz
4.9 GHz
optional: 5.0 GHz – 5.8GHz WiMax

Switches and Indicators
DC power safety switch: On/Off
DC power ON indicator: LED
Charger Status LED: (Internal)
(Green=charged,
Orange=charging)
Charger Status LED (External)
(Green=charged, Red=charging req'd)
Audible tone alert on low battery

Battery/Charger System
Charger AC input: 90VAC-240VAC
Charging: 40watts, Standby 3watts
Automatic multi-mode 3A battery charger
Battery: 12V/18AH
Regulated 12V DC output
Internal DC power fuse: 3AG
10A SB

Physical
13.5"L x 11.75"W x 6"D
(excluding antennas/open handles)
Weight: 24 lbs
Color: Black

Command Anywhere

CAMMS™
DFK

for further information please contact:

The Americas:
Global Mesh Technologies Service
Ph: 407 965 0620

Worldwide:
Command Anywhere Pty. Ltd.
Ph: +61 8 7123 3054
commandanywhere.com